


Congratulations, you have purchased the finest exhaust system available for your motorcycle. Your Vance & Hines exhaust is designed and crafted for performance, quality, and style. Please follow the instructions below, check exhaust system for missing or damaged parts and if you need any assistance please contact our technical support line (562) 921-7461.

Attention:


This exhaust system is for racing purposes only.

PARTS LIST


ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	D270RP-S	Right Muffler	1
2	D271RP-S	Left Muffler	1
3	A334HW	1.9" Barrel Clamp	2

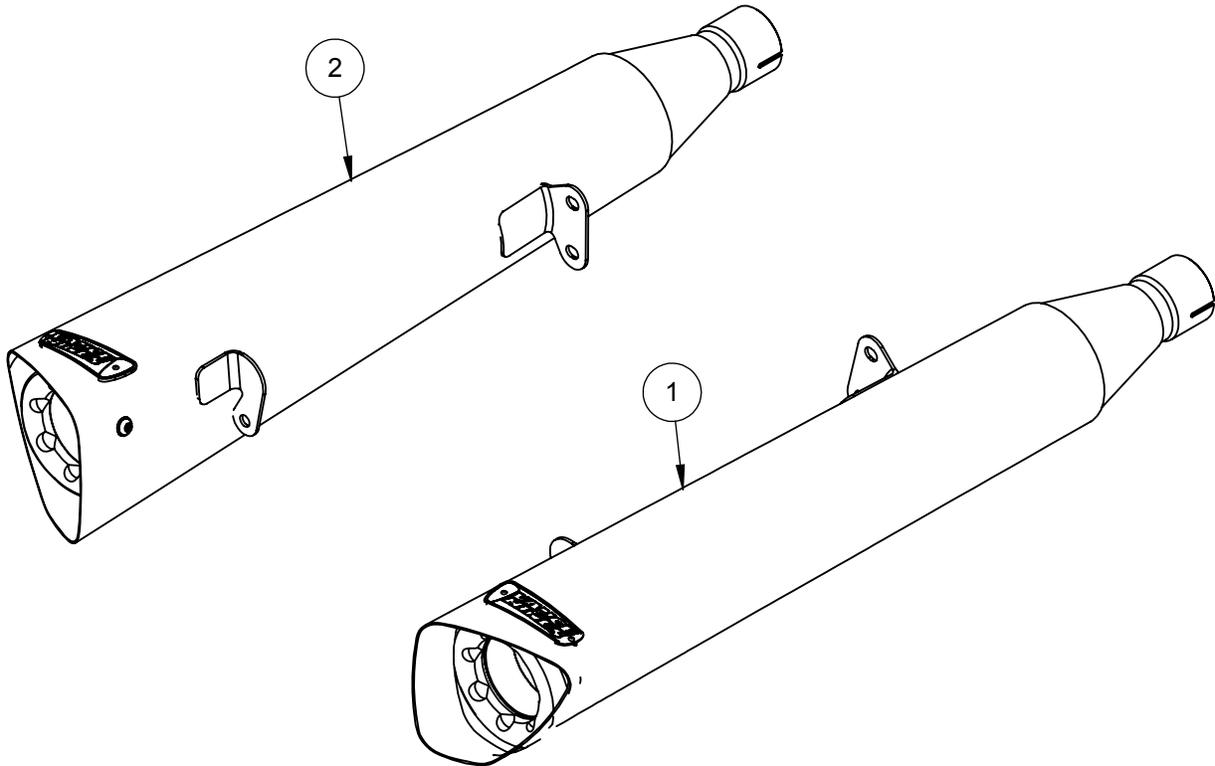


HARDWARE



TOOLS REQUIRED



DRIVE RATCHET WITH 4" EXTENSION
SOCKETS



COMBINATION WRENCHES

STOCK EXHAUST SYSTEM REMOVAL

1. Loosen and remove the two nuts holding the muffler to the passenger foot-peg.
2. Remove foot-peg assembly and set aside. Loosen and remove the single nut towards rear of the muffler which holds the muffler to the round bar section of the foot-peg/exhaust bracket.
3. Loosen muffler clamp and pull muffler away from head pipe to set aside.
4. Repeat the process for the opposite muffler. **NOTE:** It may be necessary to use a penetrating lubricant to loosen the muffler from the head pipe.

VANCE & HINES EXHAUST INSTALLATION

1. Install supplied muffler clamps onto head pipes and leave loose.
2. Slide mufflers onto stock head pipes being sure that the brackets go onto the footpeg studs and rear bracket studs.
3. Reinstall foot-pegs and tighten the three mounting nuts on each side.
4. Tighten the muffler clamps, torque to 75 in.lbs.
5. Clean all fingerprints from the exhaust using warm soapy water. Fingerprints will leave stains on the pipe once the motorcycle is started.
6. You are now ready to start the motorcycle. **NOTE:** After initial ride, it is recommended to re-torque the baffle screw to 8-10 lb. using a 5/32" allen wrench.

Emissions Notice:

In California, in order to meet Air Resources Board emissions requirements, certain aftermarket part applications have been identified as replacements, and others have received ARB Executive Orders. All other emissions related aftermarket parts are for competition use only. A list of replacement parts and EO parts, and corresponding fitment is provided at vanceandhines.com/California.

Warranty:

All Vance & Hines products are warranted against defects in material and workmanship for a period of 90 days. This warranty does not cover discoloration or rust. This warranty shall be limited to the repair or replacement of the product, which may be proven defective under normal use. Vance & Hines will not warranty any system that has been abused, misused, improperly installed or modified.

Dealers or distributors are not authorized to make dispositions binding upon Vance & Hines. Vance & Hines will not be responsible for any labor charges incurred in removing or replacing any system under warranty. A return authorization number and a copy of the original purchase invoice must accompany all returns. Parts returned without a return authorization may be refused.

13861 ROSECRANS AVENUE / SANTA FE SPRINGS, CA 90670
SALES: (562) 921-5388
TECHNICAL: (562) 926-5291
FAX: (562) 802-0110

vanceandhines
.com