




**MORE POWER : LESS NOISE**



Congratulations, you have purchased the finest exhaust system for your motorcycle on the market. Your Vance & Hines exhaust system is designed and crafted for maximum performance, a perfect fit, a great sound and unbeatable style. Please follow the installation instructions below and if you have any questions, please call our technical support line at (562) 926-5291.

Attention installer (if other than owner), please forward this instruction sheet to the owner of this product. These instructions contain valuable information to the end user.

**TOOLS  
REQUIRED**

-  Flat Blade Screwdriver
-  5/16" Nutdriver
-  7/16", 1/2" Combination Wrench
-  3/8" drive ratchet
-  9" Extension
-  3/8", 7/16", 1/2" & 9/16" Sockets

**READ ALL INSTRUCTIONS BEFORE BEGINNING INSTALLATION**

**STOCK EXHAUST  
SYSTEM  
REMOVAL**

1. Loosen heat shield clamps on both the front and rear exhaust pipes to allow for easier access to the exhaust flange nuts.
2. Loosen the clamps holding the mufflers onto the head pipes.
3. Loosen, but do not remove, the exhaust flange nuts (2 for each cylinder) from each flange located at the cylinder head.
4. Remove the Hex head flange bolts holding the muffler to the muffler support bracket.
5. Carefully lift and remove mufflers by sliding them off each head pipe. NOTE: Assistance may be required.
6. Remove the stock exhaust clamps from the nose of each muffler (these will be re-used when installing the new mufflers).


**FIGURE 1**



**FIGURE 2**



**FIGURE 3**

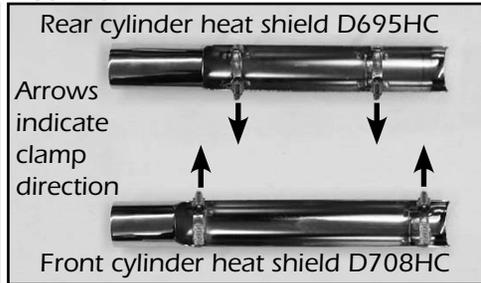

**FIGURE 4**



**VANCE & HINES EXHAUST SYSTEM INSTALLATION**

1. Remove mufflers and heat shields from their protective packaging and place them on a non-abrasive surface such as a blanket, towel or carpet.
2. Slide stock exhaust clamps onto the nose of each muffler body. NOTE: Orient the clamp in a way that you can get to the nut after installation.
3. Slide mufflers onto the head pipes.
4. Using 1/4" x 5/8" hex head bolts, nuts, and washers (Supplied), attach the mufflers to the muffler support bracket (Figure 1). NOTE: Leave them loose at this time.
5. Tighten exhaust flange nuts on both the front and rear cylinders.
6. Align mufflers so they sit level (Figure 2). Tighten the muffler mounting bolts.
7. Tighten the clamp holding the muffler onto the head pipe. Check orientation with stock head pipe heat shield to insure that you do not have interference between the clamp and stock heatshield.
8. Align head pipe heat shields and tighten the hose clamps.
9. Slide the hose clamps (Supplied) into the clips inside muffler heat shields, note direction of screwheads, they must be accessible after installation (Figure 3).
10. Slide heat shields onto muffler bodies so that the muffler is recessed 1" into the heat shield (Figure 4) and rotate so that the bottom edge of heat shield sits at the 6 o'clock position. Tighten hose clamps. NOTE: Muffler heat shield passes over the stock heat shield.
11. Check for clearance between all exhaust system components and accessories prone to heat damage.
12. Be sure to check and tighten all hardware before starting your motorcycle.

**EXHAUST CARE - HELPFUL HINTS TO AVOID DISCOLORATION OF EXHAUST SYSTEM**

1. When installing a new set of chrome pipes, make sure your hands are clean and free of oil. After installation, thoroughly clean pipes with a soft cloth and cleaning solvent that will leave no residue (chrome wax / polish, glass cleaner, alcohol, ammonia, etc...) before starting the motorcycle.
2. Avoid long periods of idling as this can cause discoloration.
3. Intake leaks can cause the engine to run lean and overheat, this could lead to discoloration.
4. Make sure there are no exhaust leaks at the junction of the exhaust pipes and cylinder head. We recommend replacing gaskets if they are worn.

**VANCE & HINES OPTIONAL ACCESSORIES**

**FUELPAK**



**FUEL MANAGEMENT:**  
Take the guess work out of fuel injection with Fuelpak Fuel Management. Contact your local dealer or call (562) 921-0071 to order. Visit [fuelpakfi.com](http://fuelpakfi.com) for more information. Fuelpak is intended for racing or off-highway use only, and is not legal for sale or use in California on pollution-controlled vehicles.

**QUIET Baffle**



Quiet baffle P/N 21869 is available for this system. The quiet baffle will lower the sound level by 2-3db on average. Contact your local dealer to order.


PLEASE NOTE: Every effort is made for Vance & Hines Exhaust Systems to provide improved cornering clearance. However, due to design and space limitations on some motorcycle models, ground and cornering clearance may not be improved and in some cases may be reduced. Be sure to follow proper installation instructions.



**PACKING LIST**

**MORE POWER : LESS NOISE**


ALL PARTS SHOWN ARE ACTUAL SIZE



1/4" x 5/8" Hex Head Bolt x 6



1/4" Lock Nut x 6



1/4" Flat washer x 12



#28 Hose Clamps x 4

**PARTS NOT SHOWN:**

D698RC	Muffler Assembly	x1
D699RC	Muffler Assembly	x1
D695HC	Muffler heat shield	x1
D708HC	Muffler heat shield	x1

**WARRANTY**

Vance & Hines exhaust systems are warranted against defects in material and workmanship for a period of 90 days from the date of purchase from an authorized dealer. This warranty does not cover discoloration of chrome finishes. This warranty is limited to the repair or replacement of a product proven to be defective from normal use. Vance & Hines exhaust systems are designed to fit and operate on OEM motor and chassis. This warranty does not cover any product subject to abuse, misuse, improper installation or modification.

## FUEL MANAGEMENT

**GET THE MOST OUT OF YOUR RIDING EXPERIENCE...**

AN AFTERMARKET EXHAUST SYSTEM IS ONLY YOUR FIRST STEP, NOW YOU NEED FUEL MANAGEMENT.

### **NOW YOU NEED FUELPAK.**

Your fuel injected Harley-Davidson® is equipped with an ECU (electronic control unit) that's programmed to deliver fuel to the motor based on an air/fuel ratio for a stock air filter and stock exhaust system. When you install a performance exhaust system, your airflow changes, so you need a fuel management system that adjusts your air/fuel ratio to match the changes. That fuel management system is Fuelpak. Fuelpak adds and takes away fuel, allowing for a more precise range of refinement in your air/fuel ratio. Get the perfect fuel management combination with your Vance & Hines exhaust system, get Fuelpak. For more information visit the tuning center at [fuelpakfi.com](http://fuelpakfi.com)

NOTICE: Fuelpak is intended for racing or off-highway use only, and is not legal for sale or use in California on pollution-controlled vehicles.



**MORE POWER : LESS NOISE**

**13861 ROSECRANS AVENUE / SANTA FE SPRINGS, CA 90670**  
**SALES: (562) 921-5388 / TECHNICAL: (562) 926-5291 / FAX: (562) 802-0110**  
**VANCEANDHINES.COM**